



BEST AVAILABLE COPY


AB 09/1413

REC'D 17 MAY 2004

PCT

Dated 5th May 2004

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

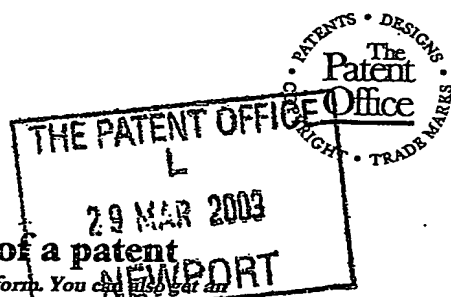

1/77
31HAR03 E796411-1 C12153
P01/7700 0.00-0307332.7

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference 573

2. Patent application number 29 MAR 2003
(The Patent Office will fill in this part) 0307332.7

3. Full name, address and postcode of the or of each applicant (underline all surnames)

CARBON TECHNOLOGIES NV
LANDHUIS JOONCH
KAYA RICHARD J BEAUJON
CARACAO
NETHERLANDS ANTILLES

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation 8343030001

4. Title of the invention

SHAPED POROUS MATERIALS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

COHEN, ALAN NICOL
2 GROVE PLACE
TATSFIELD
Nr. WESTERHAM
KENT
TN16 2BB

Patents ADP number (if you know it) 6963557001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
--	---------	---	--

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)
---	-------------------------------	--

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

Claim(s)

Abstract


Drawing(s)

16

2

IDL

9+9



10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

28-3-03

12. Name and daytime telephone number of person to contact in the United Kingdom

Alan N Cohen

01959 577172

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Shaped Porous Materials

The present invention relates to a method for forming a complex shaped controlled porosity adsorbent material.

5

There are very few viable routes for the production of complex shaped controlled porosity adsorbent materials. For instance activated carbon is traditionally produced by taking a char, made by pyrolysing an organic precursor or coal, grinding the char to a fine powder, mixing this with a binder, typically pitch, and extruding or pressing to give a "green" body. The green body is then further fired to pyrolyse the binder and this is then typically further activated in steam, air, carbon dioxide or mixtures of these gases to give the high surface activated carbon product. The drawback to this route is that the binder, which is usually a thermoplastic material, goes through a melting transition prior to pyrolytic decomposition. At this point the material is weak and unable to support a complex form. This, combined with the problems of activating the fired body, limits the size and shape of the products to typically simple extrudates.

10

15

An alternative route is to take an activated carbon powder and form this directly into the final shape. In this instance a range of polymeric binders have been used that remain in the final product. The main drawback to this route is that high levels of binders are required and these then tend to both infill the pores of the activated carbon powder and encapsulate the powder leading to a marked reduction in adsorption capacity and a deterioration in the adsorption kinetics. The presence of the polymeric phase also degrades the physical and chemical stability of the formed material severely limiting the range of applicability.

20

25

A further alternative is to take a formed ceramic material, such as a multichannel monolith, and to coat this with a carbon forming precursor such as a phenolic resin, this can then be fired and activated to produce a ceramic-carbon composite. The main limitations of this route are the cost associated with the ceramic substrate and

30

the relatively low volume loading of carbon. At high degrees of activation it is possible to produce a mesoporous carbon although the carbon volumetric loading and the mechanical stability of the carbon is further reduced.

5 EP 0 254 551 gives details of methods of forming the porous carbons and its contents are included herein by reference. The process comprises (a) partially curing a phenolic resin to a solid, (b) grinding the solid to form particles, (c) forming the resulting ground product into a dough and extruding to a pre-determined shape at a pressure in the range 0 to 20 MPa, (d) sintering the shaped solid so as to produce a
10 form-stable sintered product. The sintered product can then be activated.

Patent application PCT/GB 2002/003259 discloses an improved method of forming complex carbon forms by sintering partially cured phenolic resin powders. In this route the novolak resin precursor is partially cured using hexamethylene tetramine
15 (Hexamine) to an extent sufficient to just convert the thermoplastic novolak to a thermoset resin. The resin is then milled to a powder with a particle size of between 5 and 500 microns, mixed with an extrusion aid such as methyl cellulose to form a dough, and extruded to produce complex monolith structures which, after drying, can be carbonised and activated. The formed carbons have a very uniform structure,
20 exhibit good thermal and electrical conductivity and can be produced with surface areas up to around $1000\text{m}^2/\text{g}$. The only drawback to this production route is that the phenolic resin derived carbons can only be produced with pores of approximately 0.6-1.0nm which is too small for many applications.

25 Patent application PCT/GB01/03560 discloses a method for the production of a meso/macroporous monolithic carbon by using a meso/macroporous phenolic resin, produced according to patent EP 0 254 551, in conjunction with novolak phenolic resin as a binder. It is not possible to produce the meso/macro porous monoliths direct from the meso/macroporous resins of EP 0 254 551 as the high degree of cure
30 required to generate the meso/macro pores prevents the resin particles from sintering.

If, however the porous resin powder is mixed with a powder comprising thermoplastic novolak and hexamine curing agent, and this is then extruded using methocell as an extrusion agent, the material can be dried, carbonised and activated to give a micro/mesoporous carbon monolithic structure. The drawbacks to this route are that the novolak resin binder tends to partially infill the meso/macro pore structure of the cured resin component leading to a reduction in pore volume and that the porous cured resin cannot be produced with pores in the critical 1-5nm pore size range.

5 We have now devised a method for producing strong, controlled pore structure materials using a mixture of a partially cured resin and a wide range of secondary materials.

According to the invention there is provided a method for producing a porous material which comprises (i) partially curing a phenolic resin to a solid, (ii) grinding the solid to form resin particles, (iii) mixing the resin particles with particles of a secondary component, (iii) forming the mixture into a dough (iv) shaping the dough to obtain a shaped solid product and (v) sintering the shaped solid so as to produce a form-stable sintered product. The sintered product can then be activated extruded and dried.

20 The dough can be shaped by a range of processes e.g. extrusion, pressing, moulding, spray drying etc.

25 Phenolic resins are well known materials. They are made by the reaction of a phenol and an aldehyde e.g. formaldehyde. The condensation is initially carried out to produce a partially condensed product. The condensation may be carried out so as to produce a resin which is fully curable on further heating. Alternatively the condensation may be carried out so as to produce a novolak resin which is only curable when an additional cross-linking agent is mixed with it e.g. hexamethylene

30

tetramine (known as "hexamine" or "hex"). It is preferred to use hexamine-cured novolak resins in the process of the present invention.

5 The resin cure should be controlled so that it is sufficient to prevent the resin melting during subsequent carbonisation but low enough that the particles produced during the milling step can sinter during subsequent processing. Preferably the temperature and duration of the partial curing step is selected as to give a degree of cure sufficient to give a sinterable product, and being such that a sample of the partially cured solid when ground to produce particles in the size range 106-250 microns and tabletted in a
10 tableting machine gives a pellet with a crush strength which is not less than 1 N/mm. Preferably the pellet after carbonisation has a crush strength of not less than 8 N/mm.

Novolak resins are typically produced by the acid catalysed condensation of phenol and formaldehyde in approximately equimolar amounts. Novolaks are usually
15 thermoplastic solid polymers that melt at or above 100°C depending on the average molecular weight. They are essentially linear chains with molecular weights of from 500 to 2000 D, where phenolic moieties are linked with methylene (predominantly) and methylene ether bridges and possess one nucleophilic active site, predominantly in the unsubstituted ortho-position to hydroxyl group. There can be also varying
20 degrees of chain branching depending upon the production conditions.

Whilst the commercial materials are largely produced using phenol and formaldehyde, a variety of modifying reagents can be used at the pre-polymer formation stage to introduce a range of different oxygen and nitrogen functionality's
25 and cross-linking sites. These include but are not limited to: -

1. Hydroquinone and resorcinol. Both are more reactive than phenol and can lead to some cross-linking at the pre-polymer production stage. It is also possible to introduce these compounds at the cross-linking stage to provide different cross-
30 linking paths. These also increase the oxygen functionality of the resins.

2. Nitrogen containing compounds that are active in polycondensation reactions, such as urea, aromatic (aniline) and heteroaromatic (melamine) amines. These allow the introduction of specific types of nitrogen functionality into the initial polymer (and
5 final carbon) and influence the development of the mesoporous structure of both the resins and the final carbons.

Like hydroquinone and resorcinol, all the nitrogen containing nucleophilic modifying reagents which can be used in the present invention possess two and more active sites
10 and are more reactive in condensation reactions than phenol or Novolaks. It means that they are first to react with primary cross-linking agents forming secondary cross-linking agents *in situ*. In the case of melamine it is preferable to prepare the secondary cross-linking agent - hydroxymethylated melamine - in advance.

15 Novolaks are thermally stable in that they can be heated and cooled repeatedly without structural change. They are cured on addition of cross-linking agents and heating.

The secondary material can be any powdered solid which is not adversely affected by
20 the sintering process or which interferes unacceptably with the resin. Secondary materials which can be used include, but are not limited to, activated carbon powder, graphite, metals, metal and inorganic oxides and mixtures thereof. In this instance the partially cured resin powder does not act as binder but rather creates a cage structure that retains the secondary component or components without in any way
25 changing the porosity of the second component.

As the sintered resin structure shrinks substantially during firing (~40% volume) leading to a reduction in the inter particle pore volume the volume of the second component, which typically does not shrink during firing, must be controlled so that it
30 fills the pore volume of the fired material rather than the pore volume of the resin

precursor. If the volume of the secondary component significantly exceeds the pore volume of the fired sintered resin it will restrict the shrinkage of the resin leading to cracking and a marked degradation of the mechanical properties of the composite. Through the use of different secondary components it is then possible to produce
5 complex shaped materials with a wide range of complex adsorption, catalytic and physical properties.

If the secondary component is an activated carbon powder, preferably a mesoporous activated carbon with a mean pore size in the 1-5nm range, it is possible to produce
10 an activated carbon monolith where the pore structure is the summation of the pores derived from the sintered phenolic resin component and those derived from the secondary activated carbon. This has the benefit that activated carbons can be used that have extremely high and controlled mesopore structures but are normally only available as fine powders.

15 In producing these binary materials the pyrolysis conditions for the sintered resin/activated carbon composite structure can be adjusted in line with the expected end use of the product. If the desired product characteristics derive from the activated carbon component the pyrolysis temperature can be reduced to circa 350°C, sufficient
20 to eliminate the methyl cellulose from the product macropore structure but without substantially degrading the resin component. If however a higher thermal and/or chemical stability is required the pyrolysis temperature can be increased. The maximum temperature is then defined by the thermal stability of the secondary component.

25 The production of mesoporous structured carbons is difficult, if not impossible, by other methods as the extreme activation of a complex structure required to give a high mesoporosity would lead to severe degradation and loss of mechanical performance. Conversely the use of conventional binders would lead to the infilling of the pore
30 structure of the activated carbon powder and the resultant loss of porosity

At temperatures below $\sim 600^{\circ}\text{C}$ the resin component acts as an inert cage structure whilst at higher temperatures the micro pore structure of the phenolic resin derived carbon starts to develop along with an increase in thermal and electrical conductivity.

- 5 This then provides a route for the production of controlled resistivity carbon structures and also for electrically conducting oxide systems where the oxide is actually a resistor. In this instance the secondary component could be, but is not limited to, amorphous oxides (e.g. silica) zeolites, layered clays etc. where there is no simple way of producing complex physical forms. The limitations are that the
- 10 pyrolysis temperature must be consistent with the thermal stability of the oxide component and carbon component must be stable in the application environment.

- The pyrolysed structure can also be further activated using steam or carbon dioxide. For some applications, where a high pyrolysis temperature is required to give the
- 15 structure good thermal and chemical stability, but the micro pore structure of the phenolic resin derived carbon is not required, or degrades the product properties, the composite structure can be further heat treated to temperatures above 1000°C . This progressively eliminates the resin carbon micropore as the temperature is increased and can be used to further control the porosity of the secondary activated carbon.

- 20 Binary materials can also be produced where the secondary component does not add to the porosity of the composite but serves to modify the physical properties, such as electrical conductivity, thermal capacity magnetic susceptibility etc. of the composite. If graphite powder is used as an additive this results in a substantial reduction in the
- 25 resistivity of the composite that is a function of the amount of added graphite and the composite pyrolysis temperature and to a lesser extent the size and shape of the graphite component. This provides a route to a complex structure with a unique combination of adsorption and electrical properties that can be used in for instance fuel cells, batteries and supercapacitors. It is also possible to use other conducting
- 30 powders such as copper, aluminium etc provided that the processing temperature of


the composite does not exceed the melting point of the metallic component. In these cases a conductivity benefit can be obtained when the processing temperature is such that some sintering of the metallic component occurs.

5 In adsorption processes, the high heat-of-adsorption of many adsorbates and the low thermal capacity of the activated carbon, can lead to problems with severe bed exotherms that typically limits the adsorbate concentration to a maximum of 1-2% volume. One approach has been to try an increase the thermal capacity of the carbon adsorbent bed by either replacing some of the carbon with an inert high thermal
10 capacity material or using a lower capacity (less activated) carbon. This either results in a significant reduction in bed capacity or has limited benefit. However if a binary material is produced according to the current invention from a high thermal capacity powder and the partially cured resin it is possible to produce a material with the same volumetric adsorption capacity but a dramatically increased thermal capacity. Such
15 additives can be selected according to their cv characteristics as they do not contribute to the mechanical properties of the formed structure.

Ideal materials include but are not limited to high atomic weight metals etc. The only limiting factors in the selection of the secondary component are the temperature at
20 which the composite will be formed (typically 850-950°C for an activated carbon structure) and the chemical environment where the finished material will be used. Such materials are expected to have major benefits in areas such as gasoline vapour adsorption where the feed vapour concentration typically exceeds 50% volume.

25 A further modification is where the secondary component is used to chemically modify the primary component. It has been shown that it is possible to convert carbon to silicon carbide by treating the carbon precursor with either silicon or silicon monoxide. In the first case the carbon is typically covered with the silicon powder. The mixture is either heated to a temperature sufficient to generate a vapour pressure
30 of silicon which diffuses into, and reacts with the carbon structure or where the

carbon is impregnated with molten silicon. In the case of SiO, this is usually created *in situ* by the reaction between silicon and silica or carbon and silica:-



Although the direct use of SiO is also possible. The drawback to both methods is that it is necessary for the silicon component to diffuse into the carbon structure which for complex structures, such as monoliths, can require very long processing times.

10

Through the current invention it is possible to produce a composite structure where the silicon generating agent is already present in the structure. The binary structure can be produced from a mixture of the resin powder with silicon powder, silicon monoxide powder or a mixture of carbon or silicon and silica. In general the routes based on conversion using SiO are preferred as these are net shape processes resulting in essentially no change in the matrix geometry whilst silicon leads to an expansion in the matrix which can cause some problems. It is also possible to simply add silica and use the carbon matrix as the carbon source for the production of the SiO. This however removes carbon from the matrix which may be unacceptable although it can also lead to the production of silicon carbide with an enhanced porosity. However this approach, via direct reaction with the oxide, can be extended to other oxide and carbide materials such as tungsten and molybdenum where vapour phase transport of the oxide is not possible.

The materials of the current invention can be produced in a wide variety of shapes using processes such as extrusion, pressing, moulding, spray drying etc.

The invention is illustrated in the following examples.

30

In the Examples the resin powder was formed from a precursor novolak resin, in a process in which the precursor novolak resin in fine powder form, was mixed with 3 parts by weight of finely powdered hexamethylene tetramine (HEX). The mixed powder was placed in shallow trays and heated to 150°C to carry out the partial cure.

- 5 The resulting resin block was hammer milled to give a powder with a particle size between 100microns and 2mm. This powder was then jet milled using a Hozokawa jet mill to give a powder with a mean particle size of 30microns.

Example 1 Mesoporous Activated Carbon Powder.

10

This generates a mesoporous monolithic structure.

- This resin powder was then dry mixed with the other components shown in table 1
The Polyethylene oxide (PEO) was supplied by Sigma Aldrich. The mesoporous
15 activated carbon was CXV grade supplied by Elf Atochem. The Novolak component was the uncured novolak powder, containing HEX, as used to produce the cured resin.

Table 1

20

	202nov59	202dec04	202dec11	202dec14
Resin	80	60	70	50
CXV Carbon	20	20	30	30
Methocell	6	6	6	6
Novolak	0	20	0	20
POE	1	1	1	1
Water	93.6	91.9	95	110
%wt CXV est	0.352	0.352	0.482	0.482

- After dry mixing the powder water was gradually added in a Kenwood mixer until a pliable dough was formed. This was then ram extruded into simple rods, tubes and
25 square channel monoliths. The damp extrudates were allowed to dry overnight in ambient air and were then post cured in an air oven at 150°C to give the "green"

materials. These were carbonised in flowing carbon dioxide at 900°C. The estimated CXV content shown in table is calculated based on a carbon yield of 45% for the cured resin and the novolak components and a zero carbon yield for the methocell and the PEO.

5

The pore structure characteristics of the resulting carbons are shown in figure 1. The filled symbols are the porosity measured using nitrogen adsorption. The open symbols are the corrected pore structure of the CXV component based on the estimated CXV content from table 1. These can be compared with the porosity of the pure CXV component. It can be seen that for the lower CXV content the corrected pore structure falls below that of the pure CXV whilst for the high CXV content material there is reasonable agreement. This suggests that decomposition products created during the pyrolysis process reduce the available porosity at low CXV contents. There is also some evidence that the presence of the novolak component reduces the porosity of the carbonised composite at low CXV contents.

10
15

Example 2

In example 2 a further set of materials were produced by the method as described in example 1 but without the addition of the novolak component and with a wider range of CXV contents from an estimated CXV content in the carbonised material 18.8 to 75.8% weight as shown in table 2. The weight losses during carbonisation of the cured composites are shown in table 2 and vary between 46.8 and 25.8% weight as the CXV content increases. This reflects the absence of any weight loss from the CXV component.

20

25

30

Table 2

	202dec03	203jan44		203jan28		203jan45	203jan46
	CXV	3	4	5	6	7	8
resin		45	40	35	30	25	20
cxv		5	10	15	20	25	30
MC		3	3	3	3	3	3
POE		0.5	0.5	0.5	0.5	0.5	0.5
water		41.5	48.3	59.09	62.6	71.02	85.41
resin carbon yield	0.48						
est CXV cont	100	18.8	34.2	47.2	58.1	67.6	75.8
Carb weight loss		46.79	42.32	39.34	28.82	40.35	25.75
Carbon Density		0.818	0.725	0.631	0.566	0.519	0.473

5 The pore structures of the carbonised materials are shown as the filled symbols in figure 2. The pore structures of the carbonised materials are also then corrected to just the CXV component as the open symbols. It can be seen that within the limits of the accuracy of the estimate of the CXV content the corrected structures are in good agreement with the observed CXV pore structure. The impact of the underlying porosity of the phenolic resin derived carbon is also apparent at a logD of <1.2.

10 The variation in the BET area and pore volume of these materials as a function of CXV loading is shown in figure 3. This shows that the relationship between area/pore volume and carbon loading is approximately linear up to ~80% CXV content.

15 Example 3

20 In example 3 the CXV modified carbons (202DEC11), based on the formulation containing 70 parts resin and 30 parts CXV, was subjected to further heat treatment at between 1100C and 1700C. It can be seen from figure 4 that the large pores, with a mean at LogD=2 (100 angstroms) are largely unaffected by the heat treatment whereas the smaller pores, with a peak logD=1.2 deriving from the CXV, and those below logD=1.2 that derive from the phenolic resin, are significantly reduced at

between 1100 and 1200C. This is in marked contrast to patent US4163775 where much higher temperatures are required to eliminate the smaller pores.

Example 4

5

10

15

The materials shown in these results can be applied in adsorption applications. Mesoporous carbons are widely used in evaporative emission control devices which are used to limit the escape of gasoline vapour from vehicles during refuelling and hot soak. A well controlled mesopore structure is essential if the carbon is to have both a good adsorption capacity and be easy to regenerate using just cold gas. There is an increasing demand for such materials in the form of monoliths. At present the only available material is a carbon/ceramic composite monolith supplied by Westvaco. The pore structure of the Westvaco monolith is compared with that of the binary composite monolith produced according to the current invention in figure 5. It can be seen that the composite carbon structure has a higher porosity in the critical region above $\log D = 1.2$. Further improvements should also be possible by selection of the activated carbon component to have a pore peak at $\log D = 1.3$

Example 5 Creation of high thermal capacity carbon materials.

20

25

When VOCs are adsorbed onto activated carbons there is a significant heat production. Whilst some of the heat of adsorption is transferred to the gas stream the majority is transferred to the adsorbate. With activated carbons, where the heat capacity of the carbon is low this can result in a significant temperature rise in the carbon that can reach 100C with associated safety implications when the gas stream comprises an organic component in air. There has been a considerable effort in recent years to develop high Cp carbons for use in gasoline vapour control to reduce these temperature excursions but these have only a marginal benefit. We have now shown that if the binary component is a material with a very high Cp, for instance

copper, it is possible to generate an activated carbon with a very high density and corresponding Cp.

Example 6 Addition of Graphite to modify resistivity

5

The samples were prepared as in example 1 but fine graphite powder, supplied by Conoco was used in place of the activated carbon powder. Samples were prepared containing the amounts of the three components (resin, graphite and uncured novolak powder) shown in table 3. These were then extruded into tubes 1.4mm OD with an ID of 1mm. After carbonisation at 800C in flowing carbon dioxide some of the tubes were further heat treated in helium at temperatures up to 2200C.

10

15

Table 3

Precursor Formulation			Carbon Formulation		
Resin	Graphite	Novolak	Resin	Graphite	Novolak
83.33%	0.00%	16.67%	83.33%	0.00%	16.67%
80.83%	2.50%	16.67%	78.44%	5.39%	16.17%
78.33%	5.00%	16.67%	73.82%	10.47%	15.71%
72.67%	10.67%	16.67%	64.29%	20.97%	14.74%
66.67%	16.67%	16.67%	55.38%	30.77%	13.85%
63.33%	20.00%	16.67%	50.89%	35.71%	13.39%
43.33%	40.00%	16.67%	29.10%	59.70%	11.19%

20

The resistance of the tubes was measured using a four point contact device and converted to resistivity based on the measured tube cross section. The variation in resistivity with graphite content in the final carbon material and heat treatment temperatures of 800°C and 1600°C are show in figure 6. The low resistivity of the 1600°C material reflects the lower resistivity of the phenolic resin component as the resistivity of the graphite component will remain unchanged as a function of heat

treatment. Both lines converge toward the limiting resistivity of the graphite component as the graphite content increases although the resistivity of the high graphite binary system is always lower reflecting the greater contribution of the graphite component.

5

The effect of heat treatment temperature on resistivity is shown in figure 7. It can be seen that the systems reach a limiting low resistivity at a heat treatment temperature of approximately 1400°C irrespective of the graphite content of the composite. This represents the temperature at which the phenolic component reaches its minimum resistivity.

10

Example 7 Fuel Cell Applications

In our co-pending application a novel fuel cell structure was described based on hollow carbon fibres. It was shown that for fibres with diameters in the range from around 100 microns to 800 microns and with high electrical conductivity and gas permeability the theoretical power densities significantly exceeded those that could be achieved using conventional bipolar plate designs. However a limitation on the design was the requirement to assemble the cells from arrays of the very small hollow carbons fibres and to achieve the necessary electrical and gas connections. This invention now provides a far simpler way of assembling these high power cells. The ability to independently control the resistivity, porosity and permeability of the binary materials of this invention whilst maintaining the formability of the single component materials in our co-pending applications now allows us to extrude multichannel array to replace the fibre bundle arrays disclosed in WO 02/15309. The structure of one of the layers is shown in figure 8 where the channel size is of the order of the inner diameter of the earlier carbon fibres and the overall array thickness is between 500 and 1000 microns.

15

20

25

This design allows considerable freedom of action in that the wall thickness of the faces, that control gas diffusion and cell performance can be minimised whilst maintaining the thickness of the walls between the channels to give acceptable conductivity. It is also possible to convolute the exposed surfaces to increase the accessible surface area as shown in figure 9.

Claims

1. A method for producing a porous material which comprises (i) partially curing a phenolic resin to a solid, (ii) grinding the solid to form resin particles, (iii) mixing the resin particles with particles of a secondary component, (iii) forming the mixture into a dough (iv) shaping the dough to obtain a shaped solid product and (v) sintering the shaped solid so as to produce a form-stable sintered product.
2. A method as claimed in claim 1 in which the partially cured phenolic resin is a Novolak resin as herein described.
3. A method as claimed in claim 1 in which the secondary component comprises activated carbon powder, graphite, metals and inorganic oxides or mixtures thereof.
4. A method as claimed in any one of the preceding claims in which a cage structure is created that retains the secondary component or components without substantially changing the porosity of the second component.
5. A method as claimed in any one of the preceding claims in which the secondary component is an activated carbon powder.
6. A method as claimed in claim 5 in which the activated carbon is a mesoporous activated carbon with a mean pore size in the 1-5nm range.
7. A method as claimed in any one of the preceding claims in which the structure produced is a controlled resistivity carbon structure or an electrically conducting oxide system where the oxide is a resistor and the secondary component is selected from amorphous oxides, zeolites, layered clays and silica.
8. A method as claimed in any one of the preceding claims in which the sintered structure is further activated using steam or carbon dioxide.

9. A method as claimed in claim 9 in which the composite structure is further heat treated to temperatures above 1000°C.

5 10. A method as claimed in any one of the preceding claims in which the secondary component does not add to the porosity of the composite but serves to modify the physical properties of the composite.

10 11. A method as claimed in claim 10 in which the physical property is electrical conductivity, thermal capacity or magnetic susceptibility.

12. A method as claimed in any one of the preceding claims in which the secondary component is an electrically conducting material

15 13. A method as claimed in claim 10 in which the secondary component is a graphite powder.

13. A method as claimed in claim 10 in which the secondary component is a metal.

20 14. A method as claimed in any one of the preceding claims in which the secondary component is a silicon powder, silicon monoxide powder or a mixture of carbon or silicon and silica and silicon carbide is formed by the sintering process.

25 15. A method as claimed in any one of the preceding claims in which the secondary component is a tungsten and molybdenum oxide and a carbide is formed during the sintering process.

16. A method as claimed in any one of the preceding claims in which the dough is shaped by extrusion, pressing, moulding or spray drying.



- 19 -

Abstract

5 A method for forming a complex shaped controlled porosity absorbent material comprises adding a powdered material such as activated carbon to a partially cured phenolic resin powder forming the mixture into a dough, shaping the dough to obtain a shaped solid product and sintering the shaped solid so as to produce a form-stable sintered product.

10

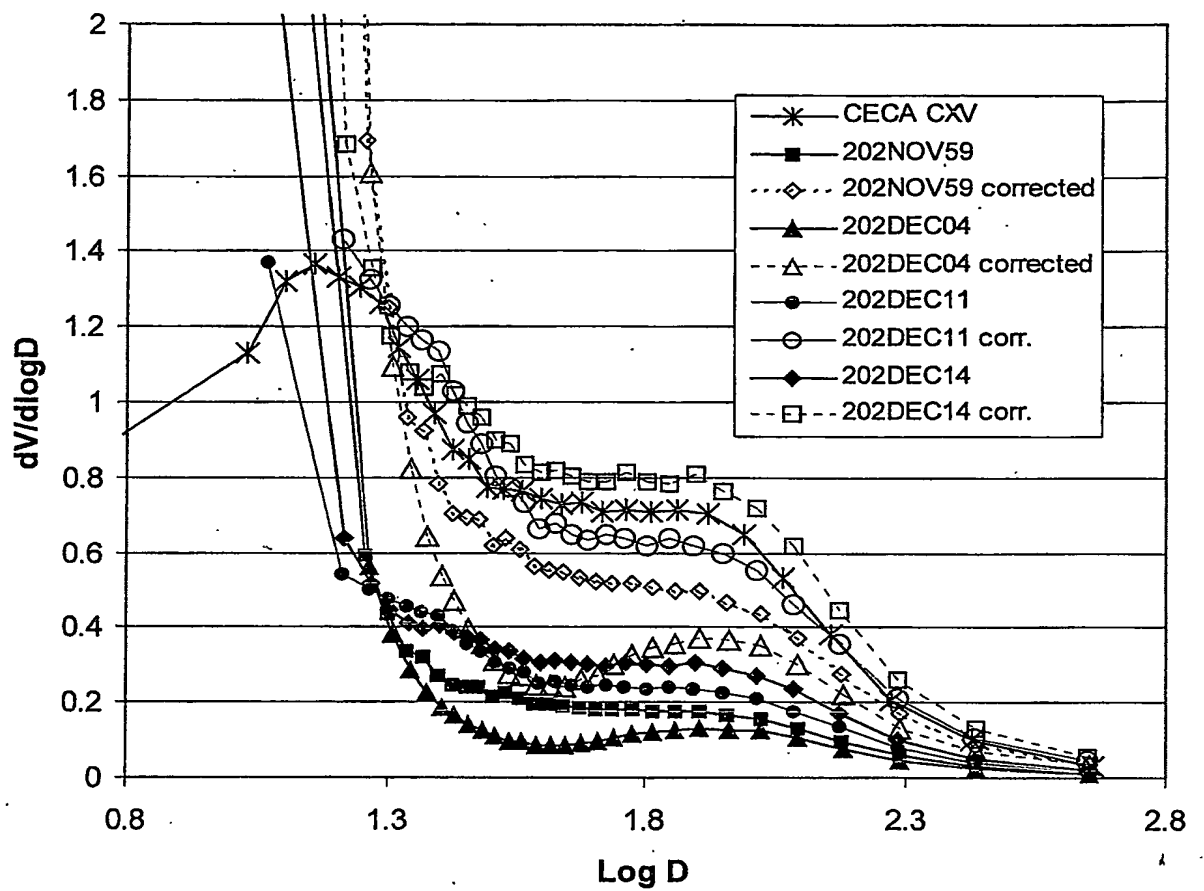


Figure 1

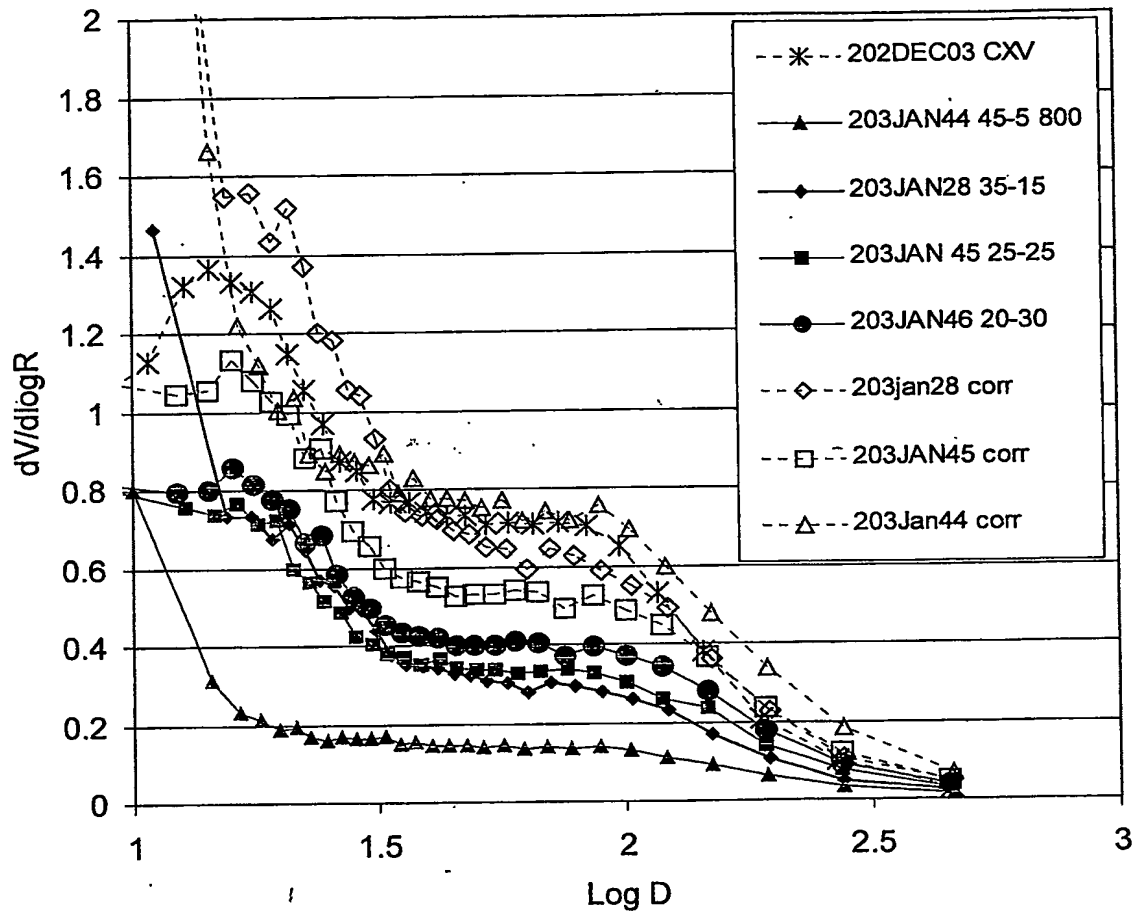


Figure 2

3/9

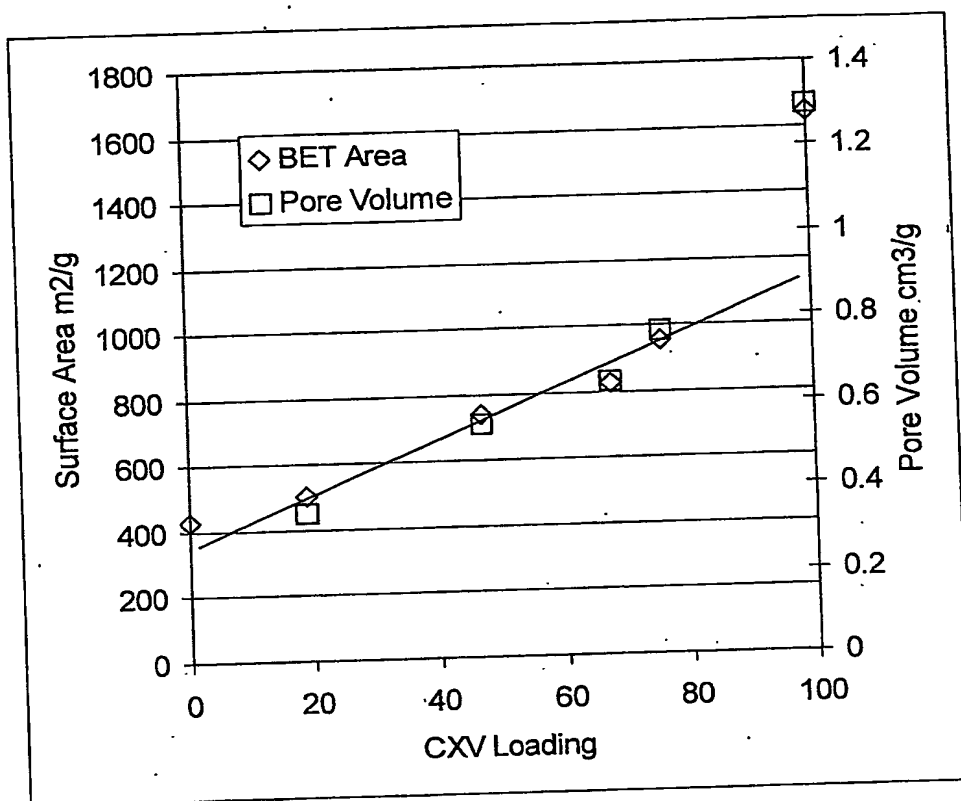


Figure 3

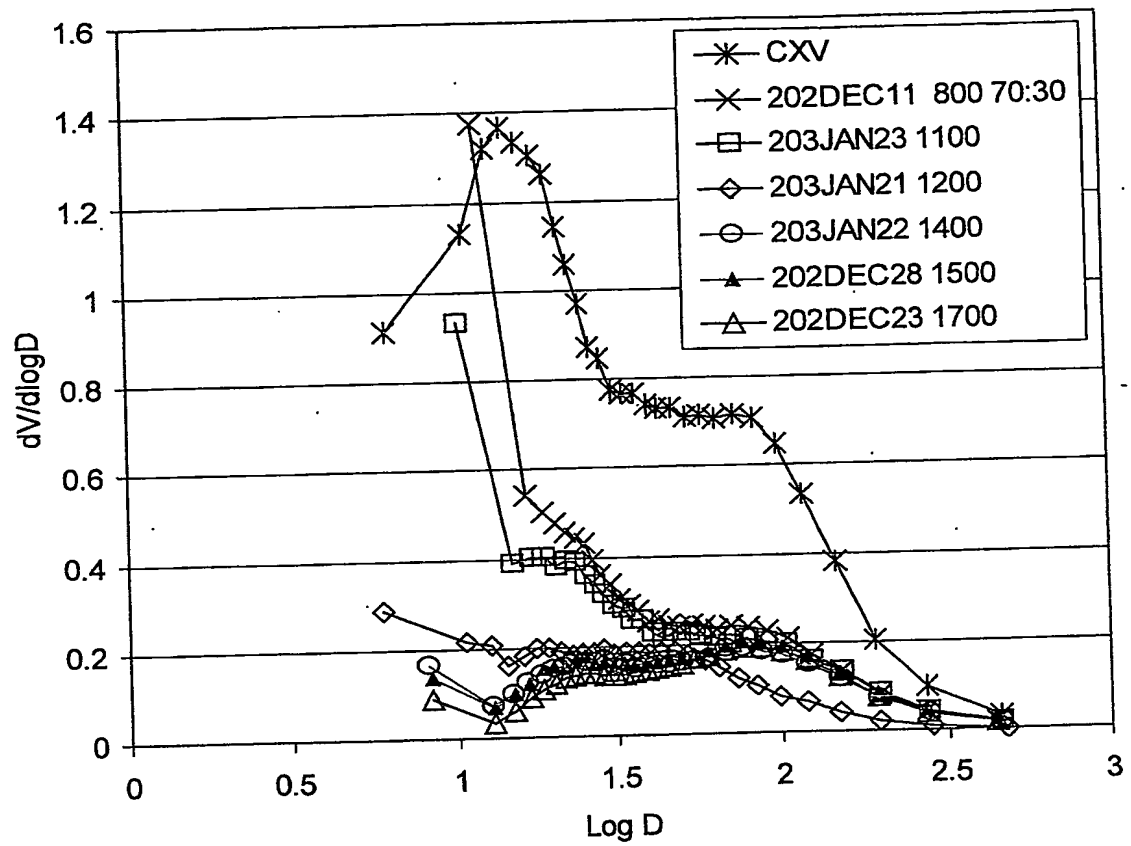


Figure 4

5/9

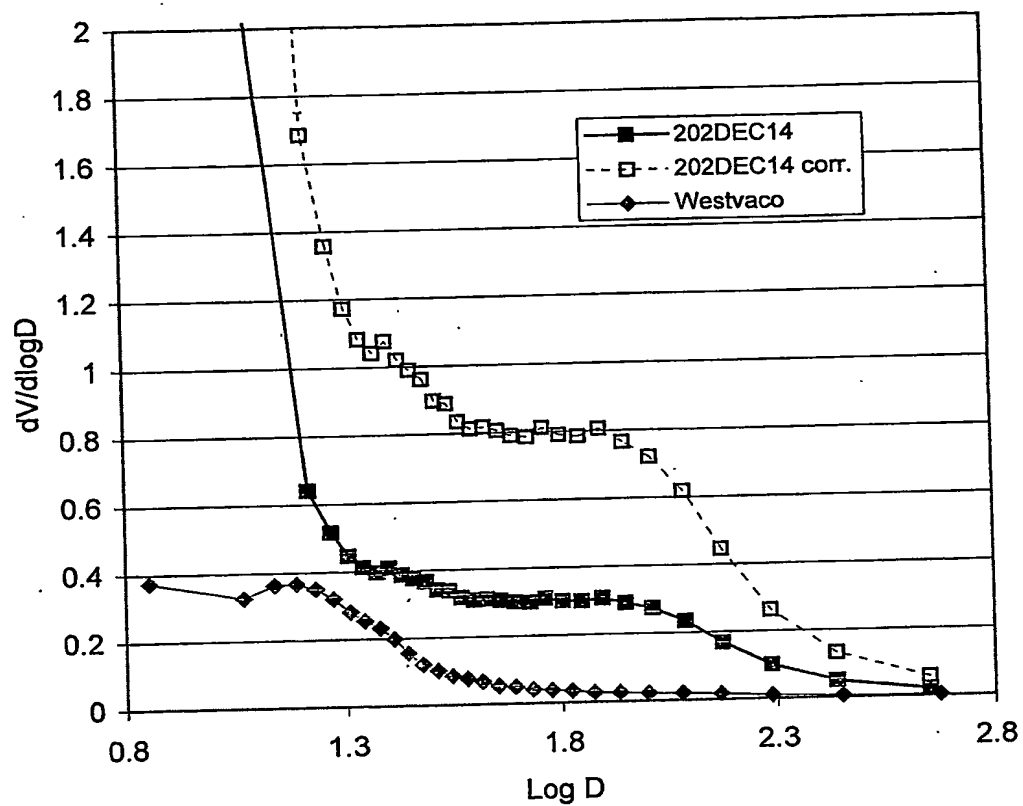


Figure 5

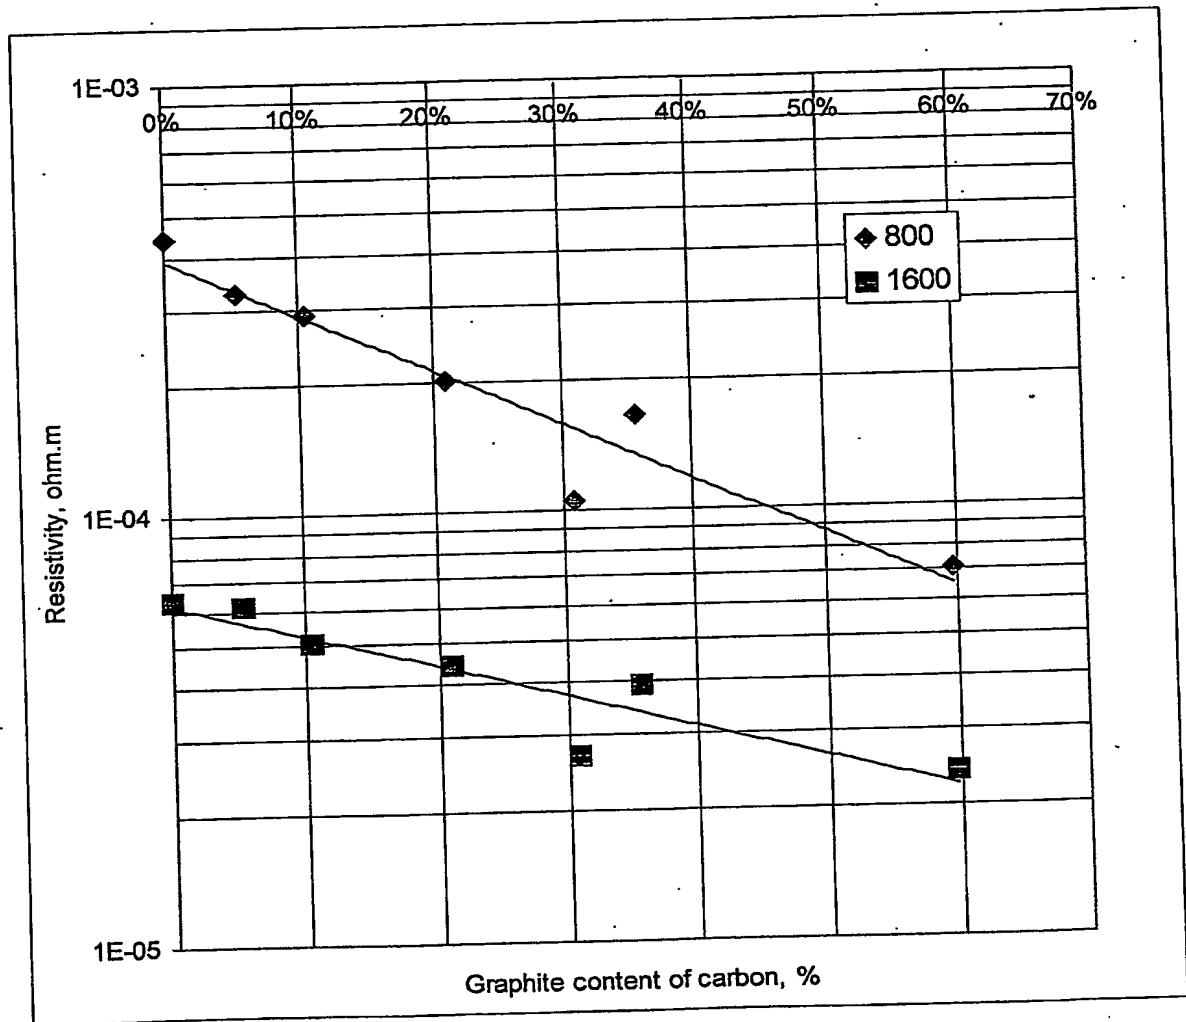


Figure 6

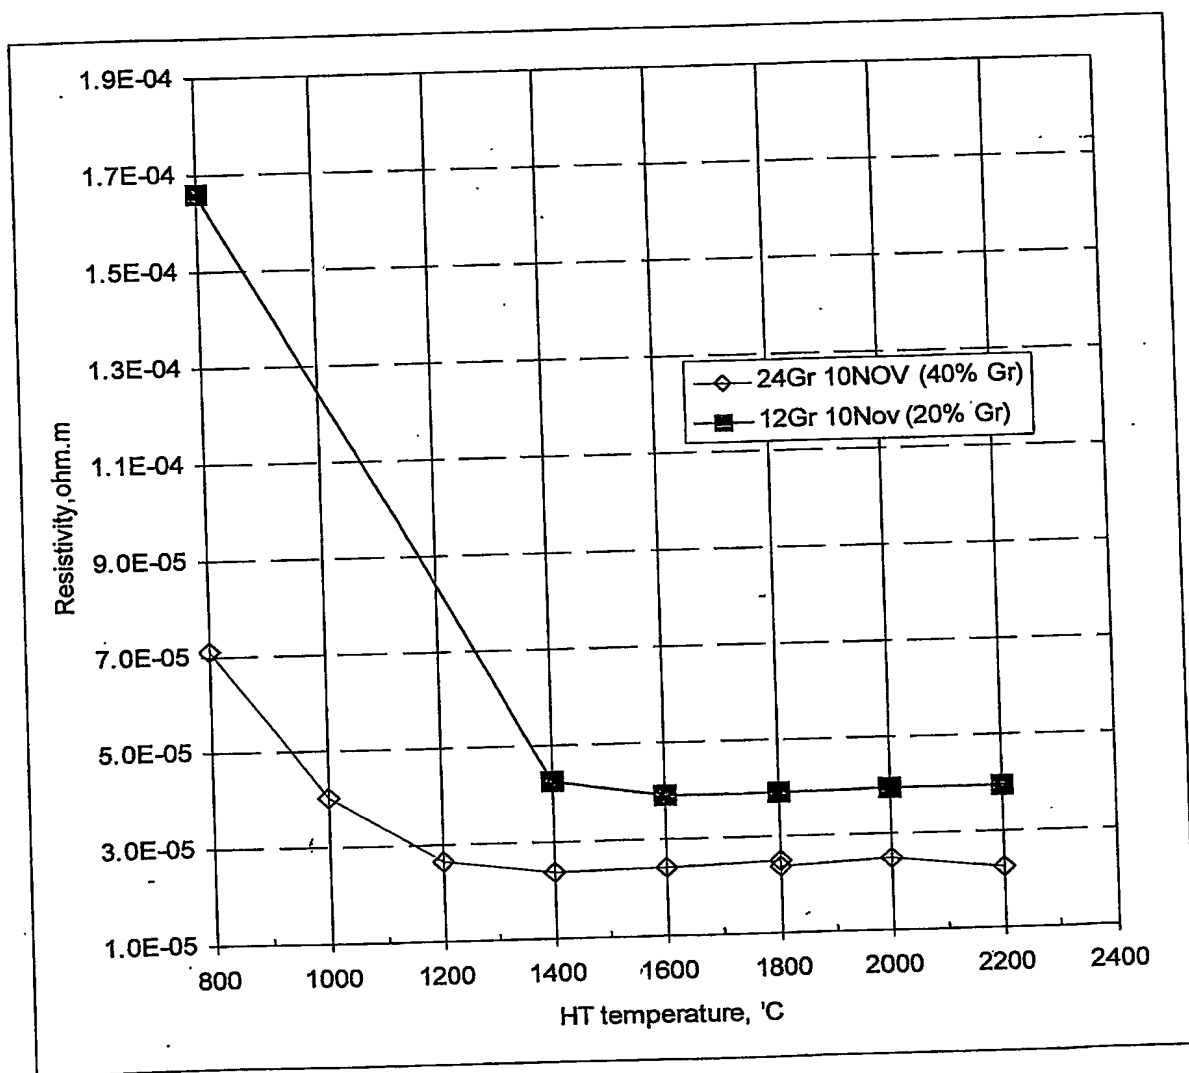


Figure 7. Effect of heat treatment on resistivity

8/9

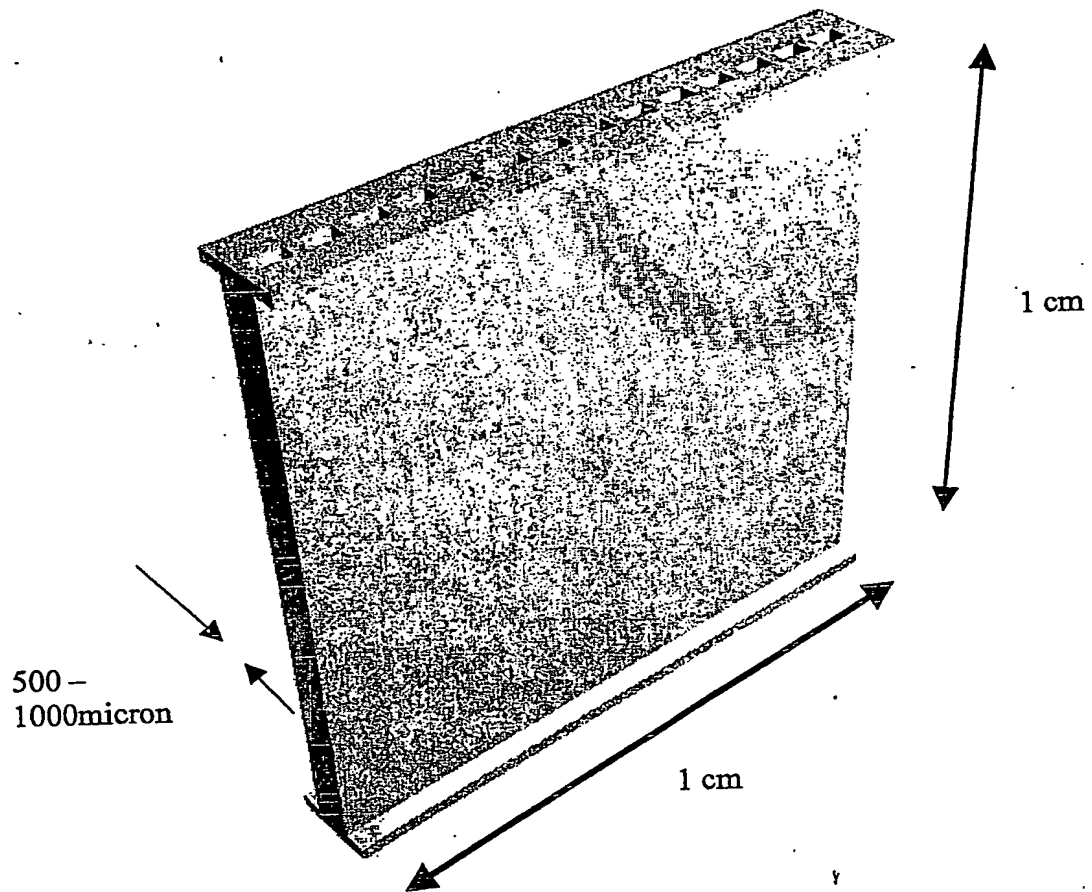


Figure 8 Extruded Array for Fuel Cell Monopolar Layer

9/9

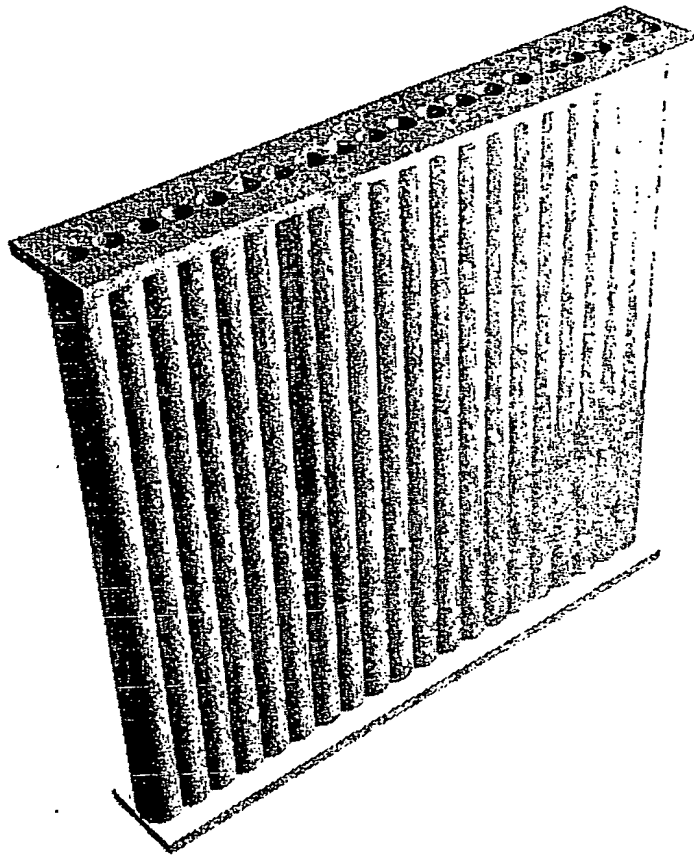


Figure 9 Convoluted Surface Extruded Array



PCT/GB2004/001413



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.